

ACCZENT CLASSIC 40



ACCZENT CLASSIC 40

Simply fit: a comfortable solution for smooth and safe daily light commercial or home use

SENSORIAL BENEFITS


- Available in 2, 3 and 4 meter widths
- Large palette of classic and modern designs

FUNCTIONAL BENEFITS

- Good underfoot & acoustic comfort
- Good cleaning & maintenance properties

ENVIRONMENTAL BENEFITS

- REACH Compliant
- Better indoor air quality

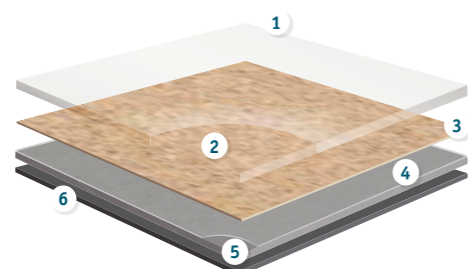

ACCZENT CLASSIC 40

- 1 Easy maintenance and very high resistance to scratches: TopClean™ PUR reinforcement treatment
- 2 Resistance to abrasion: 0.40mm pure PVC transparent wear layer
- 3 High definition print
- 4 Superior dimensional stability ($\leq 0.40\%$): Glass fibre non-woven reinforcement
- 5 Resistance to indentation and tearing: Solid homogeneous calendared sheet made of recycled vinyl
- 6 PVC Backing

TECHNICAL DATA	STANDARDS	ACCZENT CLASSIC 40
Classification		
Type of floor covering	ISO 10582	Heterogeneous Compact Vinyl
Classification	ISO 10874 (EN 685) commercial	Class: 32
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	0.40mm
Total weight	ISO 23997 (EN 430)	2 150g/m ²
PU treatment	-	TopClean™
Wear layer binder content	ISO 10582	Type I
Technical performances		
Residual indentation	Average measured value	$\leq 0.10\text{mm}$
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _n or A1 _n substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 $\mu \geq 0.30$
Dimensional stability	ISO 23999 (EN 434)	$\leq 0.40\%$
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	$\leq 8\text{mm}$
Electrostatic properties	EN 1815 EN 1081	$\leq 2\text{kV}$ on concrete R1 > 10 ¹⁰ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	$\Delta L_w = 13\text{dB}$
Form of delivery	EN 24341 (EN 426)	approx. 251m x 2, 3 & 4m
Colours		34 (Wood: 13 - Rock: 3 - Antia: 1 - Moda: 11 - Technivision: 6)

The above information is subject to modifications for the benefit of further improvement (07/2016).
For more detailed technical information, please contact Tarkett.



Download the product offer